clamps

PERMANENT FASTENERS

TECHNICAL ADVANTAGES

- Shakeproof
- Very high torque
- Corrosion resistance
- Quick and easy installation
- Sleek appearance
- Perfect deburring, avoiding any risk of injuries
- Very cost-effective solution
- Useable at a wide range of pressures

SELECTION

HOW TO SELECT EAR CLAMPS

A - Determine the outer diameter of the hose to be crimped.
B - Add 1 mm.
C - Select a clamp of the resulting diameter.

FITTING

HOW TO FIT EAR CLAMPS

1 - Position the clamp on the part to be crimped.

2 - Insert the hose between the clamp and the part.



3 - Tighten progressively, in four stages, using the SER 02 crimping pliers.

REMOVING

HOW TO REMOVE EAR CLAMPS

Cut the clamp across its width using a pair of pliers.

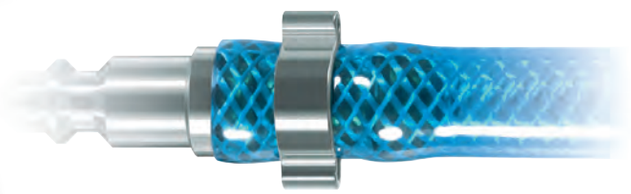

SINGLE EAR O CLIPS

Stay tight	Diameter **Wide range**	Smoothed	Cost-effective	Extremely tight clamp	Construction **Zinc-plated steel**	Safety **safe to use**	Installation **Easy to fit**

		A	B	Diameter Min / Max mm	Band width mm	Number of ears	Packing	REFERENCE
Standard treated steel clips								
		9.3	5.5	7 - 9	6	1	100	0709E
		10.3	6	8 - 10	6	1	100	0810E
		11.3	6.5	9 - 11	6.5	1	100	0911E
		12.3	7	10 - 12	6.5	1	100	1012E
		13.3	7.5	11 - 13	6.5	1	100	1113E
		14.3	8	12 - 14	7	1	100	1214E
		16.3	8.5	14 - 16	7	1	100	1416E
		18.5	9.5	16 - 18	7	1	100	1618E
Stainless steel clips								
		9.3	5.5	7 - 9	6	1	100	INOX 0709E
		10.3	6	8 - 10	6	1	100	INOX 0810E
		11.3	6.5	9 - 11	6.5	1	100	INOX 0911E
		12.3	7	10 - 12	6.5	1	100	INOX 1012E
		13.3	7.5	11 - 13	6.5	1	100	INOX 1113E
		14.3	8	12 - 14	7	1	100	INOX 1214E
		15.3	8	13 - 15	7	1	100	INOX 1315E
		16.3	8.5	14 - 16	7	1	100	INOX 1416E
		17.5	9	15 - 17	7	1	100	INOX 1517E
		18.5	9	16 - 18	7	1	100	INOX 1618E
		19.5	9.5	17 - 19	7.5	1	100	INOX 1719E
		20.5	10	18 - 20	7.5	1	100	INOX 1820E
Standard treated steel clips with ring								
		8.5	5.5	7.5 - 8.5	6	1	100	0708EG
		9.5	6	8 - 9.5	6	1	100	0809EG
		10.5	6.5	9 - 10.5	6.5	1	100	0910EG
		11.5	7	10 - 11.5	6.5	1	100	1011EG
		12.5	7.5	10.5 - 12.5	6.5	1	100	1012EG
		13.3	8	11.5 - 13.3	7	1	100	1113EG
		15.3	8.5	13 - 15.3	7	1	100	1315EG
		17.3	9.5	15 - 17.3	7	1	100	1517EG
Stainless steel clips with ring								
		8.5	5.5	7.5 - 8.5	6	1	100	INOX 0708EG
		9.5	6	8.2 - 9.5	6	1	100	INOX 0809EG
		10.5	6.5	9 - 10.5	6.5	1	100	INOX 0910EG
		11.5	7	10 - 11.5	6.5	1	100	INOX 1011EG
		12.5	7.5	10.5 - 12.5	6.5	1	100	INOX 1012EG
		13.5	8	11.5 - 13.5	7	1	100	INOX 1113EG
		14.5	8	12.5 - 14.5	7	1	100	INOX 1314EG
		15.3	8.5	13 - 15.3	7	1	100	INOX 1315EG
		16.3	9	14 - 16.3	7	1	100	INOX 1416EG
		17.3	9.5	15 - 17.3	7	1	100	INOX 1517EG
		18.3	9.5	16 - 18.3	7.5	1	100	INOX 1618EG
		19.3	10	17 - 19.3	7.5	1	100	INOX 1719EG

DOUBLED EARED O CLIPS

Ease of use	Installation **Easy to fit**	Stay tight	Diameter **Wide range**	Smoothed	Cost-effective	Extremely tight clamp	Construction **Treated steel**	Safety **safe to use**

		A	B	Band width mm	Packing	Number of ears	Diameter Min/Max mm	REFERENCE
Standard treated steel clips								
				2-ear-clamps				
		7.3	3	6	100	2	05 - 07	0507
		9.3	3	6	100	2	07 - 09	0709
		11.3	3	7	100	2	09 - 11	0911
		13.3	3.5	7	100	2	11 - 13	1113
		15.3	3.5	7	100	2	13 - 15	1315
		17.5	4.5	7	100	2	14 - 17	1517
		18.5	4.5	7	100	2	15 - 18	1518
		20.5	5.5	7	100	2	17 - 20	1720
		21.5	5.5	7	100	2	18 - 21	1821
		23.5	5.5	8	100	2	20 - 23	2023
		25.5	6	9	100	2	22 - 25	2225
		27.5	6.5	9	100	2	23 - 27	2327
		28.5	7	9	100	2	25 - 28	2528
		31.5	7	9	100	2	28 - 31	2731
		34.5	7.5	9	100	2	31 - 34	3134
		37.5	7.5	9	100	2	34 - 37	3437
		40.5	8	10	50	2	37 - 40	3740
		43.5	8.5	10	50	2	40 - 43	4043
		16.5	8.5	10	50	2	43 - 46	4346
Treated steel double O clip								
				9	100		12 - 13	1213D
				9	100		14 - 15	1415D
				9	100		16 - 17	1617D
				9	100		18 - 19	1819D
Stainless steel								
				2-ear-clamps Component: 304L stainless steel				
		7.3	4.3	6	100	2	05 - 07	INOX 0507
		9.3	4.3	7	100	2	07 - 09	INOX 0709
		11.3	5.3	7	100	2	09 - 11	INOX 0911
		13.3	5.8	7	100	2	11 - 13	INOX 1113
		15.3	6.3	7	100	2	13 - 15	INOX 1315
		18.5	7	8	100	2	15 - 18	INOX 1518
		20.5	7.6	8	100	2	17 - 20	INOX 1720
		23.5	8.5	8	100	2	20 - 23	INOX 2023
Pincers for assembling clips								
				Pincers				SER 02
				Pincers with extra side jaws				SER 04
O clip kit								
				Assortment of 210 standard Prevost O clips, Refs. 0911 to 2327				
								BC 0927

clamps

QUICK AND EASY

PBJ

SCREW CLAMPS WITH PERFORATED STRIP

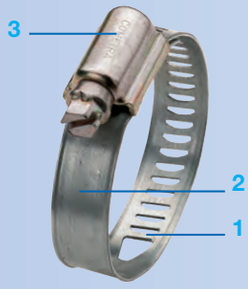

► **Flexible perforated strip**
- Economical
- Available as kit for producing large diameter custom clamps

► **Square threads**
3 m, 5 m and 25 m strips available for producing custom diameter clamps.

► **All applications**

1 **Material**
Electrogalvanised steel.

2 **Raised edges**
The raised edges help ensure that the clamp seats correctly without any risk of cutting the hose.

3 **Pressed housing**
Electrogalvanised pressed housing.

PBS - PBI - PBX

SCREW CLAMPS WITH SOLID BAND

► **High tightening torque**
- Reliable
- No risk of coming loose
- Not sensitive to vibrations
- Constant pressure
- Corrosion resistance (PBI)
- Excellent corrosion resistance (PBX)
- Food industry or marine environment (PBX)

► **All applications**

1 **Material**
PBS - High quality galvanised carbon steel with 10 to 14 micron zinc plating.
PBI - 304 stainless steel
PBX - 316 stainless steel

2 **Raised edges**
The raised edges help ensure that the clamp seats correctly without any risk of cutting the hose

3 **Pressed housing**
Housing manufactured from steel tube, protected by corrosion-proof blue lacquer.

4 **Square threads**
Square thread drive. Forged screw threads and tappings to ensure dependability despite vibrations.

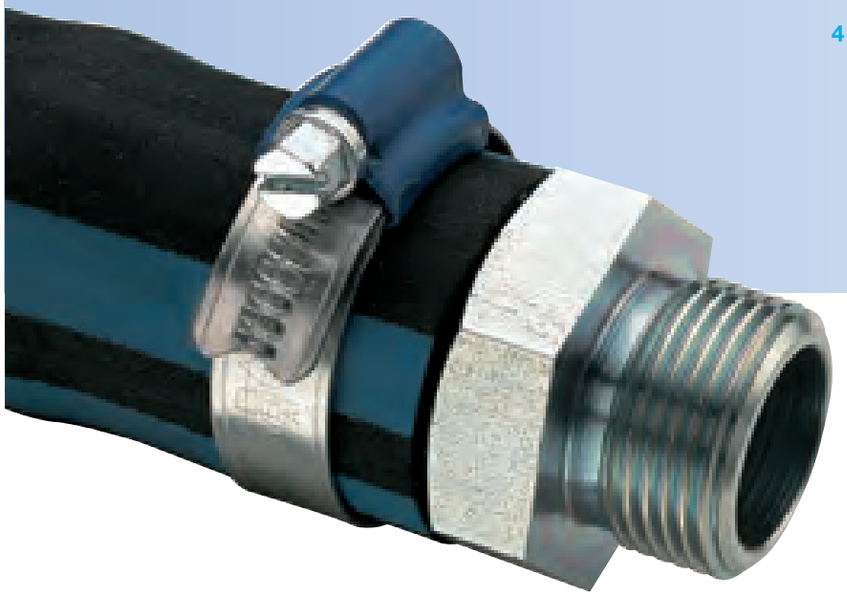

PBR

STURDY CLAMPS

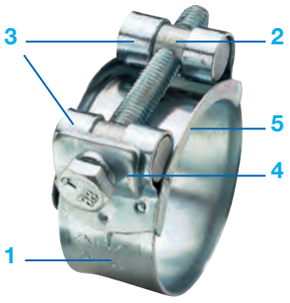

► **For heavy-duty applications**
- High torque
- Double screw retaining mechanism for dependability and longevity
- Low friction and easy accessibility

► **All harsh applications**
- Water - Air
- Irrigation, pumping, etc.

1 Material
High quality galvanised carbon steel with 10 to 14 micron zinc plating.

2 Screw and nut system
For high tightening torque.

3 Double screw retention

4 Screw placed on washer
Reduces friction and improves accessibility.

5 Strip saddle
Placed under the screw:
- Protects the hose
- High torque

PBC

RUBBER-COATED CLAMPS

► **Mounting - Protection**
- Suspension
- Retention
- Vibration absorption
- Hose protection
- Seal between pipes and clamps

► **Applications**
- Automotive industry
- Shipbuilding
- Refrigeration
- Wiring

1 Material
Bent galvanized steel strip.

2 Protection
EPDM rubber.

3 Clamping
Bolt and nut (not supplied).

4 Fixing
Oval mounting hole for easier adjustment.

PF

DOUBLE GALVANISED WIRE CLAMPS

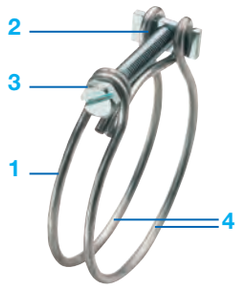

► **Constant gap double wire technique**
- Cost-effective solution for difficult seals, particularly on smooth fittings

► **Applications**
- Rigid and semi-rigid hoses whose cross-section is not always perfectly cylindrical
- Air conditioning
- Air ducts

1 Material
Zinc-plated steel.

2 Clamping
Screw and nut.

3 Head
8 mm slotted hex head.

4 Double wire

PBM

MINI CLAMPS



- Clamps for small, thin-walled hoses.
- Does not damage hose
- Perfect seal
- Good resistance

1 Material
Zinc-plated steel.

2 Raised edges
Help ensure that the clamp seats correctly without any risk of cutting the hose.

3 Captive nut
Remains in place even if the screw is removed.

PBP

MICRO CLAMPS

- Clamps for small diameter hoses.
- Suitable for use in cramped locations

1 Material
White chrome-plated electrogalvanised steel.

2 5 mm strip
Appropriate micro-housing.

SOLID-BAND WORM-DRIVE CLAMPS

Square thread **Die-cast band**	Stamped one-piece housing	Raised edges	Extremely tight clamp	Diameter **Wide range**	Construction **High-quality carbon steel**	Shockproof

		A	B	Diameter Min/Max. mm	Band width mm	Extremely tight clamp Nm	Packing Box quantity	REFERENCE
Clamps - Standard 9 mm band								
		20	0.8	08 - 14	9	2.5 - 3.5	100	PBS9 814
		20	0.8	11 - 17	9	2.5 - 3.5	100	PBS9 1117
		20	0.8	13 - 20	9	3 - 4	100	PBS9 1320
		24	0.8	15 - 24	9	3 - 4	50	PBS9 1524
		24	0.8	19 - 28	9	3 - 4	50	PBS9 1928
		24	0.8	22 -32	9	3 - 4	50	PBS9 2232
		24	0.8	26 - 38	9	4 - 4.5	25	PBS9 2638
		29	0.8	32 - 44	9	4 - 4.5	25	PBS9 3244
		29	0.8	38 - 50	9	4 - 4.5	25	PBS9 3850
		29	0.8	44 - 56	9	4 - 4.5	25	PBS9 4456
		32	0.8	50 - 65	9	4 - 4.5	25	PBS9 5065
Clamps - Standard 12 mm band								
		22	0.8	15 - 24	12	4 - 4.5	50	PBS12 1524
		23	0.8	19 - 28	12	4 - 4.5	50	PBS12 1928
		25	0.8	22 - 32	12	4 - 4.5	50	PBS12 2232
		25	0.8	26 - 38	12	4 - 4.5	25	PBS12 2638
		29	1	32 - 44	12	5 - 6	25	PBS12 3244
		29	1	38 - 50	12	5 - 6	25	PBS12 3850
		29	1	44 - 56	12	5 - 6	25	PBS12 4456
		32	1	50 - 65	12	5 - 6	25	PBS12 5065
		32	1	58 - 75	12	5 - 6	25	PBS12 5875
		32	1	68 - 85	12	5 - 6	10	PBS12 6885
		32	1	77 - 95	12	5 - 6	10	PBS12 7795
		32	1	87 - 112	12	5 - 6	10	PBS12 87112
		32	1	106 - 138	12	5 - 6	10	PBS12 104138
		32	1	132 - 165	12	5 - 6	10	PBS12 130165
		32	1	150 -180	12	5 - 6	10	PBS12 150180
		32	1	175 - 205	12	5 - 6	10	PBS12 175205
		32	1	200 - 231	12	5 - 6	10	PBS12 200231
		32	1	226 - 256	12	5 - 6	10	PBS12 226256
		32	1	251 - 282	12	5 - 6	10	PBS12 251282
		32	1	277 - 307	12	5 - 6	10	PBS12 277307

SOLID-BAND WORM-DRIVE CLAMPS

Square thread **Die-cast band**	Stamped one-piece housing	Raised edges	Extremely tight clamp	Construction **Stainless steel**	Broad range	Fluid **aggressive environments**

		A	B	Diameter Min/Max.mm	Band width mm	Extremely tight clamp Nm	Packing	REFERENCE
Clamps - 304 stainless steel 12 mm band								
		20	0.8	08 - 14	9	2.5 - 3.5	100	PBI9 814
		20	0.8	11 - 17	9	2.5 - 3.5	100	PBI9 1117
		20	0.8	13 - 20	9	3 - 4	100	PBI9 1320
		22	0.8	15 - 24	12	4 - 4.5	50	PBI12 1524
		23	0.8	19 - 28	12	4 - 4.5	50	PBI12 1928
		25	0.8	22 - 32	12	4 - 4.5	50	PBI12 2232
		25	0.8	26 - 38	12	4 - 4.5	25	PBI12 2638
		29	0.8	32 - 44	12	5 - 6	25	PBI12 3244
		29	0.8	38 - 50	12	5 - 6	25	PBI12 3850
		29	0.8	44 - 56	12	5 - 6	25	PBI12 4456
		32	0.8	50 - 65	12	5 - 6	25	PBI12 5065
		32	0.8	58 - 75	12	5 - 6	25	PBI12 5875
		32	0.8	68 - 85	12	5 - 6	10	PBI12 6885
		32	0.8	77 - 95	12	5 - 6	10	PBI12 7795
		32	0.8	87 - 112	12	5 - 6	10	PBI12 87112
		32	0.8	106 - 138	12	5 - 6	10	PBI12 104138
		32	0.8	132 - 165	12	5 - 6	10	PBI12 130165
		32	0.8	150 - 180	12	5 - 6	10	PBI12 150180
		32	0.8	175 - 205	12	5 - 6	10	PBI12 175205
		32	0.8	200 - 231	12	5 - 6	10	PBI12 200231
		32	0.8	226 - 256	12	5 - 6	10	PBI12 226256
		32	0.8	251 - 282	12	5 - 6	10	PBI12 251282
		32	0.8	277 - 307	12	5 - 6	10	PBI12 277307
Clamps - 316 stainless steel - Marine grade - 12 mm band								
	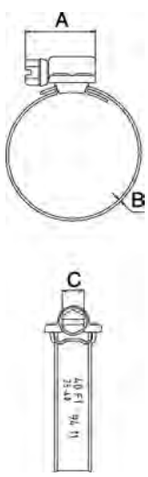	20	0.8	08 - 14	9	2,5 - 3,5	100	PBX9 814
		20	0.8	11 - 17	9	2.5 - 3.5	100	PBX9 1117
		20	0.8	13 - 20	9	3 - 4	100	PBX9 1320
		23	0.8	15 - 24	12	2,5 - 3,5	50	PBX12 1524
		23	0.8	19 - 28	12	2,5 - 3,5	50	PBX12 1928
		23	0.8	22 - 32	12	2,5 - 3,5	50	PBX12 2232
		23	0.8	26 - 38	12	3,5 - 4,5	25	PBX12 2638
		23	0.8	32 - 44	12	3,5 - 4,5	25	PBX12 3244
		23	0.8	38 - 50	12	3,5 - 4,5	25	PBX12 3850
		31	0.8	44 - 56	12	5 - 6	25	PBX12 4456
		31	0.8	50 - 65	12	5 - 6	25	PBX12 5065
		31	0.8	58 - 75	12	5 - 6	25	PBX12 5875
		31	0.8	68 - 85	12	5 - 6	10	PBX12 6885
		31	0.8	77 - 95	12	5 - 6	10	PBX12 7795
		31	0.8	87 - 112	12	5 - 6	10	PBX12 87112
		31	0.8	106 - 138	12	5 - 6	10	PBX12 104138
		31	0.8	132 - 165	12	5 - 6	10	PBX12 130165
		32	0.8	150 - 180	12	5 - 6	10	PBX12 150180
		32	0.8	175 - 205	12	5 - 6	10	PBX12 175205
		32	0.8	200 - 231	12	5 - 6	10	PBX12 200231
		32	0.8	226 - 256	12	5 - 6	10	PBX12 226256
		32	0.8	251 - 282	12	5 - 6	10	PBX12 251282
		32	0.8	277 - 307	12	5 - 6	10	PBX12 277307

STANDARD WORM-DRIVE CLAMPS

Flexible	Raised edges	Construction **Electrogalvanised steel**	Broad range

		A	B	C	D	Diameter Min/max mm	Band width mm	Extremely tight clamp Nm	Packing Box quantity	REFERENCE
Split clamp 8 mm band										
		18	0.7	8.7	12	10 - 18	8	3	100	PBJ9 1016
		18	0.7	8.7	12	14 - 24	8	3	100	PBJ9 1222
		18	0.7	8.7	12	18 - 28	8	3	50	PBJ9 1627
		18	0.7	8.7	12	24 - 36	8	3	50	PBJ9 2335
		18	0.7	8.7	12	25 - 45	8	3	25	PBJ9 3045
		18	0.7	8.7	12	32 - 52	8	3	25	PBJ9 3250
		18	0.7	8.7	12	47 - 67	8	4	25	PBJ9 5070
		18	0.7	8.7	12	77 - 97	8	4	10	PBJ9 7090
Split clamp 12 mm band										
		28.7	0.8	11.1	15	16 - 27	12	5	50	PBJ12 1627
		28.7	0.8	11.1	15	23 - 35	12	5	50	PBJ12 2335
		28.7	0.8	11.1	15	30 - 45	12	5	25	PBJ12 3045
		28.7	0.8	11.1	15	50 - 70	12	7	25	PBJ12 5070
		28.7	0.8	11.1	15	70 - 90	12	7	10	PBJ12 7090
		28.7	0.8	11.1	15	90 -110	12	7	10	PBJ12 90110
		28.7	0.8	11.1	15	110 - 130	12	7	10	PBJ12 110130

MINI AND MICRO TYPE CLAMPS

Band width **Mini: 9 mm Micro: 5 mm**	Raised edges	Extremely tight clamp **Clamps for small diameter hoses**	Attachment : Screw + nut attachment	Clamping **Thin-walled hoses**	Construction **Electogalvanised steel**

		A	Diameter Min./Max. Diameter	Extremely tight clamp Nm	Packing Box quantity	Band width mm	REFERENCE
Mini type (electrogalvanised steel) - Band width: 9 mm							
		0.5	6 x 8	1.5	100	9	PBM 8
		0.5	7 x 9	1.5	100	9	PBM 9
		0.5	8 x 10	1.5	100	9	PBM 10
		0.5	9 x 11	1.5	100	9	PBM 11
		0.5	9 x 12	1.5	100	9	PBM 12
		0.5	10 x 13	1.5	100	9	PBM 13
		0.5	11 x 14	1.5	100	9	PBM 14
		0.5	12 x 15	1.5	100	9	PBM 15
		0.5	13 x 16	1.5	100	9	PBM 16
		0.5	14 x 17	1.5	100	9	PBM 17
Micro type (electrogalvanised steel) - Band width: 5 mm							
			7 x 11	0.5 - 0.7	50	5	PBP 711
			11 x 19	0.5 - 0.7	100	5	PBP 1119

HEAVY DUTY CLAMPS

Difficult applications **Clamp for severe-difficult applications**	Raised edges	Extremely tight clamp **Ultra-high torque**	Attachment : Screw + nut attachment	Construction **Screw High quality carbon steel**	Broad range	Construction **AISI 430 stainless steel housing and band**

		A	B	Diameter Min/ Max mm	Band width mm	Extremely tight clamp Nm	Attachment : Screw + nut attachment	Packing	Screw (C)	REFERENCE
Heavy duty clamps										
		40	0.6	17 - 19	18 mm	8	M6 x 40	10	8	PBR 1719
		40	0.6	19 - 21	18 mm	8	M6 x 40	10	8	PBR 1921
		40	0.6	21 - 23	18 mm	8	M6 x 40	10	8	PBR 2123
		40	0.6	23 - 25	18 mm	12	M6 x 40	10	8	PBR 2325
		40	0.6	25 - 27	18 mm	12	M6 x 40	10	8	PBR 2527
		40	0.6	27 - 29	18 mm	12	M6 x 40	10	8	PBR 2729
		40	0.6	29 - 31	18 mm	12	M6 x 40	10	8	PBR 2931
		40	0.6	31 - 34	18 mm	12	M6 x 40	10	8	PBR 3134
		40	0.6	34 - 37	18 mm	12	M6 x 40	10	8	PBR 3437
		40	0.6	37 - 40	18 mm	12	M6 x 40	10	8	PBR 3740
		40	0.6	40 - 43	18 mm	12	M6 x 40	10	8	PBR 4043
		45	0.8	43 - 47	20 mm	23	M7 x 55	10	CHC 5	PBR 4347
		45	0.8	47 - 51	20 mm	23	M7 x 55	10	CHC 5	PBR 4751
		45	0.8	51 - 55	20 mm	23	M7 x 55	10	CHC 5	PBR 5155
		45	0.8	55 -59	20 mm	23	M7 x 55	10	CHC 5	PBR 5559
		45	0.8	59 -63	20 mm	23	M7 x 55	10	CHC 5	PBR 5963
		45	0.8	63 - 68	20 mm	23	M7 x 55	10	CHC 5	PBR 6368
		45	0.8	68 - 73	20mm	23	M7 x 45	10	CHC 5	PBR 6873
		45	0.8	79 - 79	20 mm	23	M7 x 55	10	CHC 5	PBR 7379
		45	0.8	79 - 85	20 mm	23	M7 x 55	10	CHC 5	PBR 7985
		45	0.8	85 - 91	20 mm	23	M7 x 55	10	CHC 5	PBR 8591
		55	0.8	91 - 97	20 mm	23	M7 x 55	10	CHC 5	PBR 9197
		55	0.8	97-104	20 mm	23	M7 x 55	10	CHC 5	PBR 97104
		55	0.8	104-111	20 mm	23	M7 x 55	10	CHC 5	PBR 104111
		55	0.8	111-118	20 mm	23	M7 x 55	10	CHC 5	PBR 111118
		55	0.8	118-125	20 mm	23	M7 x 55	10	CHC 5	PBR 118125
		55	0.8	125-132	20 mm	23	M7 x 55	10	CHC 5	PBR 125132
		55	0.8	132-139	20 mm	23	M7 x 55	10	CHC 5	PBR 132139
		55	0.8	139-146	20 mm	23	M7 x 55	10	CHC 5	PBR 139146
		55	0.8	146-153	20 mm	23	M7 x 55	10	CHC 5	PBR 146153
		55	0.8	153-160	20 mm	23	M7 x 55	10	CHC 5	PBR 153160
		55	0.8	160-167	20 mm	23	M7 x 55	10	CHC 5	PBR 160167
		55	0.8	167-174	20 mm	36	M7 x 55	10	CHC 5	PBR 167174
		80	1	174-187	30 mm	36	M10x80	10	17	PBR 174187
		80	1	187-200	30 mm	36	M10x80	10	17	PBR 187200
		80	1	200-213	30 mm	36	M10x80	10	17	PBR 200213
		80	1	213-226	30 mm	36	M10x80	10	17	PBR 213226
		80	1	226-239	30 mm	36	M10x80	10	17	PBR 226239
		80	1	239-252	30 mm	36	M10x80	10	17	PBR 239252

RUBBER-LINED CLAMPS

Rubber lining	Eliminates vibrations	Attachment : Screw + nut attachment	Construction **EPDM rubber**	Broad range	Construction **Galvanised steel band**

		A	B	Diameter	Band width mm	Attachment : Screw + nut attachment	Packing	REFERENCE
Clamps with rubber lining and 12 mm band								
		1.5	10.5	6	12	M5	50	PBC 126
		1.5	12	8	12	M5	50	PBC 128
		1.5	13	10	12	M5	50	PBC 1210
		1.5	14	12	12	M5	50	PBC 1212
		1.5	15.5	15	12	M5	50	PBC 1215
		1.5	18	20	12	M5	50	PBC 1220
		1.5	19	22	12	M5	50	PBC 1222
		1.5	20.5	25	12	M5	50	PBC 1225
Clamps with rubber lining and 15 mm band								
		1.8	13.7	6	15	M6	50	PBC 156
		1.8	15.2	8	15	M6	50	PBC 158
		1.8	16.2	10	15	M6	50	PBC 1510
		1.8	17.2	12	15	M6	50	PBC 1512
		1.8	18.7	15	15	M6	50	PBC 1515
		1.8	21.2	20	15	M6	50	PBC 1520
		1.8	22.2	22	15	M6	50	PBC 1522
		1.8	23.7	25	15	M6	50	PBC 1525
		1.8	25.2	28	15	M6	50	PBC 1528
		1.8	26.2	30	15	M6	50	PBC 1530
		1.8	27.2	32	15	M6	50	PBC 1532
		1.8	28.7	35	15	M6	50	PBC 1535
		1.8	30.2	38	15	M6	50	PBC 1538
		1.8	31.2	40	15	M6	50	PBC 1540

GALVANIZED DOUBLE WIRE CLAMPS

Cost-effective	Simple solution	Construction **Galvanised steel**

		A	B	Diameter Min/Max mm	Number of Ø 4 mm screws	Packing	Dimensions of the head of the screw in mm	REFERENCE
Galvanised double wire clamps								
		28.5	13	13 - 16	1	50	8	PF 1316
		28.5	13	15 - 21	1	50	8	PF 1521
		28.5	13	20 - 23	1	50	8	PF 2023
		33.5	13	22 - 25	1	50	8	PF 2225
		33.5	13	24 - 27	1	50	8	PF 2427
		33.5	13	27 - 31	1	50	8	PF 2731
		33.5	13	31 - 35	1	50	8	PF 3135
		43.5	13	35 - 40	1	50	8	PF 3540
		43.5	13	38 - 43	1	50	8	PF 3843
		43.5	13	43 - 48	1	50	8	PF 4348
		43.5	13	45 - 50	1	50	8	PF 4550
		43.5	13	49 - 55	1	50	8	PF 4955
		43.5	13	54 - 60	1	50	8	PF 5460
		43.5	13	59 - 65	1	50	8	PF 5965
		43.5	13	64 - 70	1	25	8	PF 6470
		43.5	13	69 - 75	1	25	8	PF 6975
		43.5	13	73 - 80	1	25	8	PF 7380
		43.5	13	78 - 85	1	25	8	PF 7885

WORM-DRIVE CLAMP ACCESSORIES

Sealing	Extremely tight clamp	Visually attractive

		DESCRIPTION	REFERENCE
Metal worm-drive clamp displays			
		Display with: 244 worm-drive clamps : - 100 mini type PBM and 144 standard PBS - 1 flexible worm driver	DEPANNE 244
		Display with: 400 worm-drive clamps : - 90 mini type PBM and 300 standard PBS - 1 flexible worm driver	DEPANNE 400
Assortment boxes			
		Metal case with: 133 worm-drive clamps : - 80 mini type PBM and 53 standard PBS - 1 flexible worm driver	PRATIC 135
		Blue composite case with: 270 worm-drive clamps PBS 1 flexible worm driver	PRATIC 300
		Adjustable compartment polypropylene case with : 195 standards worn-drive clamps	PBJ 195
		Case with: 150 worm-drive clamps for OD hoses 8 to 32 mm	PBS 150
Banding kit			
		Kit including : Band and housings **Band length** / **No. housings** / **Band width**	
		3 m / 8 / 9	PBK 93
		5 m / 8 / 9	PBK 95
		25 m / 0 / 9	PBK 925
		3 m / 6 / 12	PBK 123
		5 m / 6 / 12	PBK 125
		25 m / 0 / 12	PBK 1225
Hinged housing			
		100 housings for 9 mm band width	PBK 09
		100 housings for 12 mm band width	PBK 12
Flexible worm driver			
		Flexible worm driver (hex-head socket)	PB 3000