


NORMACONNECT® COMBI GRIP

Pieza ESPECIAL*

Unión para tubos de plástico y metal

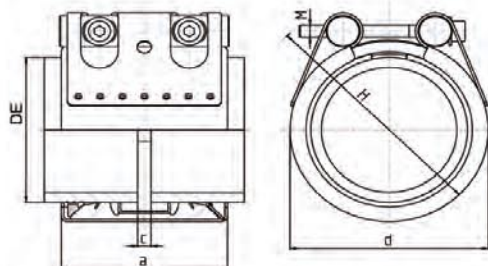

Tipo	DE (mm)	DE mín. - DE máx. Tubos Plásticos (m)	DE mín. - DE máx. Tubos Metálicos (mm)	Presión Nominal (PN)	Presión de trabajo (bar)	C máx. (mm)	a (mm)	d (mm)	h (mm)	Peso (kg)	Tornillo Allen DIN 912	
											Rosca	Par de apriete (Nm)
COMBI GRIP	40,0/38,0	39,0-40,5	37,5-38,6	16	16	8	62	60	80	0,57	M8 SW 6	15
	40,0/42,4	39,0-40,5	41,7-43,0	16	16	8	62	65	85	0,58	M8 SW 6	15
	42,4/42,4	41,7-43,0	41,7-43,0	16	16	8	62	65	85	0,58	M8 SW 6	15
	48,3/48,3	47,6-50,5	47,6-50,5	16	16	8	62	70	90	0,60	M8 SW 6	15
	50,0/48,3	49,0-50,5	47,6-50,5	16	16	8	62	70	90	0,60	M8 SW 6	15
	60,3/60,3	59,5-61,0	59,5-61,0	16	16	17	78	85	105	0,79	M8 SW 6	20
	63,0/60,3	62,0-63,5	59,5-61,0	16	16	17	78	85	105	0,79	M8 SW 6	20
	73,0/73,0	72,0-74,0	72,4-73,8	16	16	25	98	95	115	1,47	M10 SW 8	30
	75,0/76,1	74,0-76,0	75,2-77,0	16	16	25	98	100	120	1,47	M10 SW 8	30
	88,9/88,9	88,0-90,0	86,0-91,0	16	16	25	98	110	130	1,55	M10 SW 8	30
	90,0/88,9	89,0-91,0	87,1-89,9	16	16	25	98	110	130	1,55	M10 SW 8	30
	101,6/101,6	100,4-102,8	100,4-102,8	16	16	25	98	125	145	1,71	M10 SW 8	30
	110,0/108,0	109,0-111,0	106,8-109,2	16	16	25	98	130	150	1,75	M10 SW 8	40
	110,0/114,3	109,0-111,0	113,0-115,5	16	16	25	98	135	155	1,79	M10 SW 8	40
	114,3/114,3	113,0-115,5	113,0-115,5	16	16	25	98	135	155	1,79	M12 SW 10	40
	125,0/129,0	124,0-126,0	127,6-131,1	16	16	35	115	150	170	3,15	M12 SW 10	50
	140,0/139,7	139,0-141,0	138,1-141,6	16	16	35	115	160	180	3,36	M12 SW 10	50
	141,3/141,3	138,1-141,6	138,1-141,6	16	16	35	115	165	185	3,37	M12 SW 10	50
	160,0/159,0	159,0-162,0	157,3-160,7	16	16	35	115	180	200	3,64	M12 SW 10	60
	168,3/168,3	166,5-170,1	166,5-170,1	16	16	35	115	190	210	3,68	M12 SW 10	60
	200,0/204	198,0-202,0	202,0-206,0	16	16	35	142	235	265	7,5	M12 SW 10	60
	219,1/219,1	217,0-222,0	216,0-221,0	16	16	35	142	250	280	7,9	M12 SW 10	60
	225,0/219,1	222,0-227,0	217,0-222,0	10	10	35	142	255	285	8,1	M12 SW 10	60
	225,0/222,0	222,0-227,0	220,0-224,0	10	10	35	142	255	285	8,1	M12 SW 10	60
	250,0/254,0	247,0-253,0	250,0-256,0	10	10	35	142	285	315	8,6	M12 SW 10	80
	273,0/273,0	271,0-276,0	271,0-276,0	10	10	35	142	305	335	9,1	M16 SW 14	100
	280,0/273,0	277,0-283,0	270,0-275,0	10	10	35	142	310	340	9,3	M16 SW 14	100
	323,9/323,9	320,0-327,0	320,0-327,0	6	6	35	142	355	385	10,2	M16 SW 14	100
	355,0/355,6	351,0-359,0	352,0-359,0	6	6	35	142	390	420	10,9	M16 SW 14	120
	400,0/406,4	396,0-404,0	402,0-410,0	6	6	35	142	440	470	11,9	M16 SW 14	120
406,0/406,4	402,0-410,0	402,0-410,0	6	6	35	142	440	470	12,0	M16 SW 14	120	

* Disponibilidad bajo pedido.

NOTA: Consultar precios

NOTA: Para la unión de tubos de plástico (PE,PP) y en el caso de tubos de PVC con paredes delgadas, la utilización de un anillo de refuerzo es obligatorio.