


Pieza ESPECIAL*

NORMACONNECT® FLEX 3 EXTRA ANCHA

Uniones para tubos metálicos y de plástico, versión extra ancha. No absorbe esfuerzos axiales

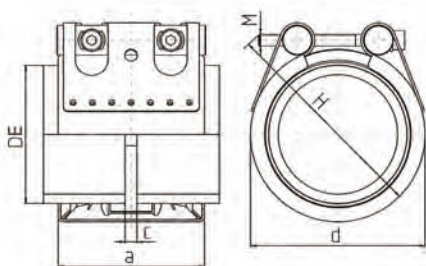

Tipo	DE (mm)	DE mín. - DE máx. (mm)	Presión de trabajo (bar)	C _{máx} (mm)	a (mm)	d (mm)	h (mm)	Peso (kg)	Tornillo Allen DIN 912	
									Rosca	Par de apriete (Nm)
FLEX 3	326,0	322,0-329,0	16,5	65	211	365	405	11,9	M16 SW 14	30
	355,6	352,0-359,0	15,5	65	211	395	435	12,4	M16 SW 14	35
	406,4	402,0-410,0	13,5	65	211	445	485	13,4	M16 SW 14	35
	429,0	426,0-431,0	12,5	65	211	465	505	13,9	M16 SW 14	35
	442,0	439,0-444,0	12,0	65	211	480	520	14,1	M16 SW 14	35
	457,2	454,0-459,0	12,0	65	211	495	535	14,4	M16 SW 14	35
	508,0	505,0-510,0	10,5	65	211	545	585	15,4	M16 SW 14	35
	531,0	528,0-534,0	10,0	65	211	570	610	15,9	M16 SW 14	35
	558,8	556,0-562,0	9,5	65	211	595	635	16,4	M16 SW 14	35
	609,6	606,0-613,0	9,0	65	211	645	685	17,4	M16 SW 14	40
	634,0	631,0-637,0	8,5	65	211	670	710	17,9	M16 SW 14	40
	711,2	707,0-715,0	7,5	65	211	750	790	19,4	M16 SW 14	40
	762,0	758,0-766,0	7,0	65	211	800	840	20,4	M16 SW 14	40
	812,8	808,0-817,0	6,5	65	211	850	890	21,4	M16 SW 14	45
	914,4	909,0-919,0	6,0	65	211	950	990	23,4	M16 SW 14	45
	1016,0	1013,0-1019,0	5,0	65	211	1055	1095	25,4	M16 SW 14	50
	1117,5	1114,0-1120,0	4,5	65	211	1155	1195	27,4	M16 SW 14	50
	1219,2	1216,0-1222,0	4,0	65	211	1255	1295	29,4	M16 SW 14	55
	1320,8	1314,0-1328,0	3,0	65	211	1360	1400	31,4	M16 SW 14	55
	1422,4	1415,0-1430,0	3,0	65	211	1460	1500	33,4	M16 SW 14	60
1524,0	1516,0-1532,0	2,5	65	211	1560	1600	35,4	M16 SW 14	60	
1625,6	1617,0-1634,0	2,5	65	211	1665	1705	37,4	M16 SW 14	70	
1727,2	1718,0-1736,0	2,0	65	211	1765	1805	39,4	M16 SW 14	70	
1828,8	1819,0-1838,0	2,0	65	211	1865	1905	41,4	M16 SW 14	80	
1930,4	1920,0-1940,0	2,0	65	211	1970	2010	43,4	M16 SW 14	80	
2032,0	2021,0-2042,0	1,5	65	211	2070	2110	45,4	M16 SW 14	80	

NOTA: Consultar precios

* Disponibilidad bajo pedido.