


NORMACONNECT® FLEX E

Pieza ESPECIAL*

Uniones para tubos metálicos y de plástico. No absorbe esfuerzos axiales

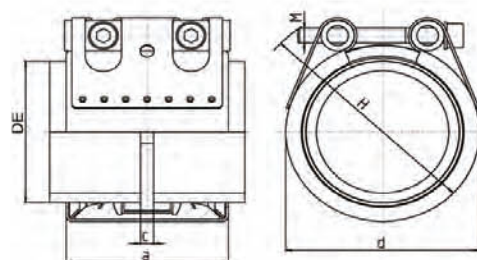

Tipo	DE (mm)	Espesor pared de tubo (mm)	DE mín. DE máx. (mm)	Presión Nominal (PN)	Presión de trabajo (bar)	C _{máx} (mm)	a (mm)	d (mm)	h (mm)	Peso (kg)	Tornillo Allen DIN 912	
											Rosca	Par de apriete (Nm)
FLEX E 1 parte	26,9	1,0	26,4-27,5	16	70	3	67	50	70	0,31	M8 SW 6	5
	28,0	1,0	27,5-28,5	16	70	3	67	50	70	0,31	M8 SW 6	5
	30,0	1,2	29,5-30,6	16	70	3	67	50	70	0,31	M8 SW 6	5
	33,7	1,2	33,0-34,3	16	60	3	67	55	75	0,32	M8 SW 6	5
	35,0	1,2	34,5-35,6	16	60	8	63	55	75	0,43	M8 SW 6	5
	38,0	1,6	37,5-38,6	16	60	8	63	60	80	0,43	M8 SW 6	5
	42,4	1,6	41,7-43,0	16	50	8	63	65	85	0,44	M8 SW 6	5
	44,5	1,6	44,0-45,1	16	50	8	63	65	85	0,45	M8 SW 6	5
	48,3	1,6	47,6-50,5	16	50	8	63	70	90	0,46	M8 SW 6	5
	54,0	1,6	53,3-54,6	16	50	17	78	75	95	0,60	M8 SW 6	10
	57,0	1,6	56,3-57,7	16	50	17	78	80	100	0,61	M8 SW 6	10
	60,3	1,6	59,5-61,0	16	40	17	78	85	105	0,62	M8 SW 6	10
	63,0	1,6	62,2-63,9	16	40	17	78	85	105	0,62	M8 SW 6	10
	70,0	2,0	69,0-71,0	16	40	25	98	90	110	1,16	M8 SW 6	10
	73,0	2,0	72,1-73,8	16	40	25	98	95	115	1,18	M8 SW 6	10
	76,1	2,0	75,2-77,0	16	35	25	98	100	120	1,18	M8 SW 6	10
	78,0	2,0	77,1-78,9	16	35	25	98	100	120	1,19	M8 SW 6	10
	80,0	2,0	79,0-80,8	16	35	25	98	100	120	1,21	M8 SW 6	10
	84,0	2,0	83,0-85,0	16	35	25	98	105	125	1,24	M8 SW 6	10
	88,9	2,0	87,0-89,9	16	35	25	98	110	130	1,26	M8 SW 6	10
	98,0	2,3	96,9-99,0	16	35	25	98	120	140	1,38	M8 SW 6	10
	101,6	2,3	100,4-102,8	16	35	25	98	125	145	1,39	M8 SW 6	10
	104,0	2,3	102,8-106,1	16	35	25	98	125	145	1,40	M8 SW 6	10
	108,0	2,3	106,8-109,2	16	35	25	98	130	150	1,42	M8 SW 6	10
	110,0	2,3	108,8-111,4	16	35	25	98	130	150	1,47	M8 SW 6	10
	114,3	2,3	113,0-115,5	16	35	25	98	135	155	1,47	M8 SW 6	15
	118,0	2,3	116,6-119,2	16	35	25	98	140	160	1,46	M8 SW 6	15
	122,0	2,3	120,8-123,2	16	32	35	113	145	165	2,09	M10 SW 8	20
	125,0	2,3	123,6-126,5	16	32	35	113	145	165	2,10	M10 SW 8	20
	129,0	2,3	127,6-131,1	16	32	35	113	155	185	2,10	M10 SW 8	20
	133,0	2,3	131,5-134,4	16	32	35	113	160	190	2,13	M10 SW 8	20
	139,7	2,3	138,1-141,6	16	32	35	113	165	195	2,19	M10 SW 8	25
141,3	2,3	139,6-142,8	16	32	35	113	170	200	2,19	M10 SW 8	25	
144,0	2,3	142,4-145,5	16	32	35	113	170	200	2,28	M10 SW 8	25	
154,0	2,6	152,3-156,1	16	32	35	113	180	210	2,31	M10 SW 8	30	
159,0	2,6	157,3-160,7	16	32	35	113	185	215	2,38	M10 SW 8	30	
168,3	2,6	166,5-170,1	16	32	35	113	195	225	2,43	M10 SW 8	30	
170,0	2,6	168,2-171,9	16	32	35	113	195	225	2,43	M10 SW 8	30	

Más referencias en la siguiente página

* Disponibilidad bajo pedido.

NOTA: Consultar precios

Pieza ESPECIAL*

NORMACONNECT® FLEX E


Tipo	DE (mm)	Espesor pared de tubo (mm)	DE mín. DE máx. (mm)	Presión Nominal (PN)	Presión de trabajo (bar)	C _{máx} (mm)	a (mm)	d (mm)	h (mm)	Peso (kg)	Tornillo Allen DIN 912	
											Rosca	Par de apriete (Nm)
FLEX E 1 parte	180,0	2,5	178,0-182,0	13,5	30,0	35	139	210	240	4,0	M12 SW 10	25
	193,7	2,5	192,0-196,0	13,5	28,0	35	139	225	255	4,1	M12 SW 10	25
	206,0	3,0	202,0-208,0	13,5	26,5	35	139	240	270	4,3	M12 SW 10	25
	219,1	3,5	216,0-221,0	13,5	23,0	35	139	250	280	4,4	M12 SW 10	25
	225,0	3,5	222,0-227,0	12,0	23,0	35	139	255	285	4,5	M12 SW 10	25
	229,9	3,5	228,0-232,0	12,0	23,0	35	139	260	290	4,5	M12 SW 10	25
	244,5	3,5	242,0-247,0	12,0	22,0	35	139	275	305	4,7	M12 SW 10	25
	254,0	3,5	250,0-256,0	12,0	21,0	35	139	285	315	4,8	M12 SW 10	25
	267,0	3,5	264,0-269,0	12,0	20,0	35	139	300	330	5,0	M12 SW 10	25
	273,0	4,0	270,0-275,0	12,0	20,0	35	139	305	335	5,1	M12 SW 10	25
	306,0	4,0	302,0-308,0	9,0	17,5	35	139	340	370	5,5	M12 SW 10	25
	323,9	4,0	320,0-327,0	9,0	17,5	35	139	355	385	5,7	M12 SW 10	25
	326,0	4,0	322,0-328,0	9,0	16,5	35	139	360	390	5,7	M12 SW 10	25
	355,6	4,0	352,0-359,0	9,0	15,0	35	139	390	420	6,0	M12 SW 10	25
	406,4	4,0	402,0-410,0	7,5	14,0	35	139	440	470	6,7	M12 SW 10	25
	429,0	4,0	426,0-431,0	5,5	13,0	35	139	460	490	6,9	M12 SW 10	40
	442,0	4,0	439,0-444,0	5,5	13,0	35	139	475	505	7,1	M12 SW 10	40
	457,2	4,0	454,0-459,0	5,5	12,0	35	139	490	520	7,3	M12 SW 10	40
	508,0	5,0	505,0-510,0	5,5	11,0	35	139	540	570	7,9	M12 SW 10	40
	531,0	5,0	528,0-534,0	5,5	10,5	35	139	565	595	8,1	M12 SW 10	40
558,8	6,3	556,0-562,0	5,5	10,0	35	139	590	620	8,5	M12 SW 10	40	
609,6	6,3	606,0-613,0	4,5	9,0	35	139	640	670	9,1	M12 SW 10	40	
634,0	6,3	631,0-637,0	4,5	8,0	35	139	665	695	9,4	M12 SW 10	40	
711,2	7,1	707,0-715,0	4,0	7,0	35	139	745	775	10,3	M12 SW 10	40	
762,0	7,1	758,0-766,0	3,2	7,0	35	139	795	825	10,9	M12 SW 10	40	

* Disponibilidad bajo pedido.

NOTA: Consultar precios

Pieza ESPECIAL*

NORMACONNECT® FLEX E 2 Partes

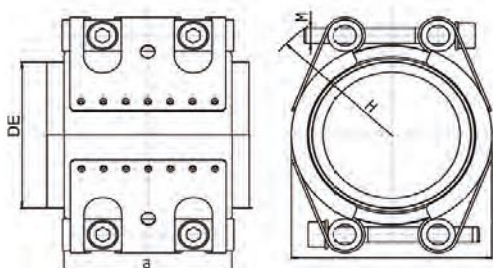

Tipo	DE (mm)	Espesor pared de tubo (mm)	DE mín. DE máx. (mm)	Presión Nominal (PN)	Presión de trabajo (bar)	C _{máx} (mm)	a (mm)	d (mm)	h (mm)	Peso (kg)	Tornillo Allen DIN 912	
											Rosca	Par de apriete (Nm)
FLEX E 2 partes	812,8	7,1	808,0-817,0	3,2	6,5	35	139	845	875	12,8	M12 SW 10	40
	914,4	7,1	909,0-919,0	2,0	5,5	35	139	945	975	14,0	M12 SW 10	45
	1016,0	8,0	1013,0-1019,0	2,0	5,0	35	139	1050	1080	15,2	M12 SW 10	45
	1117,0	8,0	1114,0-1120,0	2,0	4,5	35	139	1150	1180	16,4	M12 SW 10	50
	1219,2	9,0	1216,0-1222,0	2,0	4,0	35	139	1250	1280	17,7	M12 SW 10	50

* Disponibilidad bajo pedido.

NOTA: Consultar precios