


NORMACONNECT® GRIP E-EP

Pieza ESPECIAL*

Uniones con protección integrada contra llamas para tubos de metal.

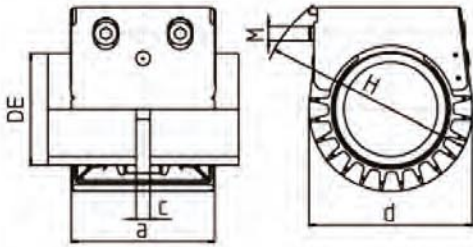

Tipo	DE (mm)	DE mín. - DE máx. (mm)	Máx. Presión de trabajo permitida	Presión de trabajo (bar)	C máx. (mm)	a (mm)	d (mm)	h (mm)	Peso (kg)	Tornillo Allen DIN 912	
										Rosca	Par de apriete (Nm)
GRIP E-EP	35,0	34,5 - 35,6	16	60	8	75	65	115	0,58	M8 SW 16	15
	38,0	37,5 - 38,6	16	60	8	75	70	120	0,58	M8 SW 16	15
	42,4	41,7 - 43,0	16	50	8	75	75	125	0,59	M8 SW 16	15
	44,5	44,0 - 45,1	16	50	8	75	75	125	0,60	M8 SW 16	15
	48,3	47,6 - 50,5	16	50	8	75	80	130	0,61	M8 SW 16	15
	54,0	53,3 - 54,6	16	50	17	90	85	135	0,92	M8 SW 16	15
	57,0	56,3 - 57,7	16	50	17	90	90	140	0,93	M8 SW 16	20
	60,3	59,5 - 61,0	16	40	17	90	95	145	0,94	M8 SW 16	20
	63,0	62,2 - 63,9	16	40	17	90	95	145	0,94	M8 SW 16	20
	73,0	72,1 - 73,8	16	40	25	110	105	155	1,49	M10 SW 8	30
	76,1	75,2 - 77,0	16	35	25	110	110	160	1,49	M10 SW 8	30
	84,0	83,0 - 85,0	16	35	25	110	115	165	1,56	M10 SW 8	30
	88,9	87,0 - 88,9	16	35	25	110	120	170	1,59	M10 SW 8	30
	101,6	100,4 - 102,8	16	35	25	110	135	185	1,75	M10 SW 8	30
	104,0	102,8 - 106,1	16	35	25	110	135	185	1,76	M10 SW 8	30
	108,0	106,8 - 109,2	16	35	25	110	140	190	1,79	M10 SW 8	30
	114,3	113,0 - 115,5	16	35	25	110	145	195	1,89	M10 SW 8	40
	125,0	123,6 - 126,5	16	32	35	125	155	195	3,25	M12 SW 10	50
	129,0	127,6 - 131,1	16	32	35	125	165	215	3,25	M12 SW 10	50
	133,0	131,5 - 134,4	16	32	35	125	170	220	3,36	M12 SW 10	50
	139,7	138,1 - 141,6	16	32	35	125	175	225	3,48	M12 SW 10	50
	141,3	139,6 - 142,8	16	32	35	125	180	230	3,48	M12 SW 10	50
	154,0	152,3 - 156,1	16	32	35	125	190	240	3,63	M12 SW 10	60
	159,0	157,3 - 160,7	16	32	35	125	195	245	3,75	M12 SW 10	60
	168,3	166,5 - 170,1	16	32	35	125	205	255	3,83	M12 SW 10	60
	193,7	192,0 - 196,0	10,0	20,0	35	155	235	285	6,9	M16 SW 14	100
	206,0	202,0 - 208,0	10,0	20,0	35	155	250	300	7,2	M16 SW 14	100
	219,1	216,0 - 221,0	10,0	20,0	35	155	260	310	7,4	M16 SW 14	100
	225,0	222,0 - 227,0	10,0	16,0	35	155	265	315	7,0	M16 SW 14	100
	229,9	228,0 - 232,0	5,5	16,0	35	155	270	320	7,0	M16 SW 14	100
	244,5	242,0 - 247,0	5,5	15,0	35	155	285	335	7,3	M16 SW 14	100
	254,0	250,0 - 256,0	5,5	14,0	35	155	285	335	7,5	M16 SW 14	100
	267,0	264,0 - 269,0	5,5	13,5	35	155	310	360	7,7	M16 SW 14	100
	273,0	270,0 - 275,0	5,5	13,0	35	155	315	365	7,8	M16 SW 14	100
306,0	302,0 - 308,0	5,5	10,5	35	155	350	400	8,4	M16 SW 14	120	
323,9	320,0 - 327,0	3,0	9,5	35	155	365	415	8,7	M16 SW 14	120	
326,0	322,0 - 329,0	3,0	9,5	35	155	370	420	8,8	M16 SW 14	120	
355,6	352,0 - 359,0	2,7	8,5	35	155	400	450	9,3	M16 SW 14	120	
406,4	402,0 - 410,0	2,5	7,0	35	155	450	500	10,2	M16 SW 14	120	
419,0	415,0 - 422,0	2,5	6,5	35	155	460	510	10,4	M16 SW 14	120	

* Disponibilidad bajo pedido.

NOTA: Consultar precios