


Pieza ESPECIAL*

NORMACONNECT® PLAST GRIP

Uniones para tubos de plástico.

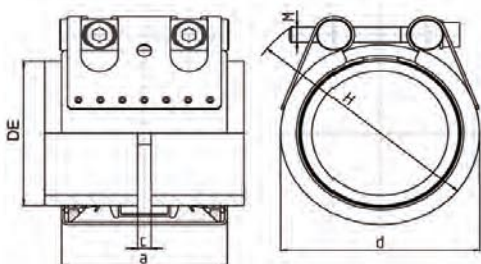

Tipo	DE (mm)	DE mín. - DE máx. Tubos Plásticos (m)	Presión Nominal (PN)	Presión de trabajo (bar)	C máx. (mm)	a (mm)	d (mm)	h (mm)	Peso (kg)	Tornillo Allen DIN 912	
										Rosca	Par de apriete (Nm)
PLAST GRIP	40,0	39,0-40,5	16	16	8	62	60	80	0,59	M8 SW 6	15
	42,4	41,7-43,0	16	16	8	62	65	85	0,59	M8 SW 6	15
	48,3	47,6-49,5	16	16	8	62	70	90	0,62	M8 SW 6	15
	50,0	49,0-50,5	16	16	8	62	70	90	0,62	M8 SW 6	15
	60,3	59,5-61,0	16	16	17	78	85	105	0,81	M8 SW 6	20
	63,0	62,0-63,5	16	16	17	78	85	105	0,81	M8 SW 6	20
	73,0	72,0-74,0	16	16	25	98	95	115	1,48	M10 SW 8	30
	75,0	74,0-76,0	16	16	25	98	100	120	1,49	M10 SW 8	30
	76,0	75,0-77,0	16	16	25	98	100	120	1,49	M10 SW 8	30
	88,9	88,0-90,0	16	16	25	98	110	130	1,59	M10 SW 8	30
	90,0	89,0-91,0	16	16	25	98	110	130	1,59	M10 SW 8	30
	101,6	100,4-102,8	16	16	25	98	125	145	1,75	M10 SW 8	30
	110,0	109,0-111,0	16	16	25	98	130	150	1,83	M10 SW 8	30
	114,3	113,0-115,5	16	16	25	98	135	155	1,83	M12 SW 10	40
	125,0	124,0-126,0	16	16	35	115	150	170	3,18	M12 SW 10	40
	140,0	139,0-141,0	16	16	35	115	160	180	3,41	M12 SW 10	50
	141,3	138,1-141,6	16	16	35	115	165	185	3,41	M12 SW 10	50
	160,0	159,0-162,0	16	16	35	115	180	200	3,68	M12 SW 10	60
	168,3	166,5-170,1	16	16	35	115	190	210	3,70	M12 SW 10	60
	180,0	178,0-182,0	16	16	35	142	210	240	7,6	M12 SW 10	60
	200,0	198,0-202,0	16	16	35	142	230	260	8,1	M12 SW 10	60
	219,1	217,0-222,0	16	16	35	142	250	280	8,6	M12 SW 10	60
	225,0	222,0-227,0	10	10	35	142	255	285	8,7	M12 SW 10	60
	250,0	247,0-253,0	10	10	35	142	280	310	9,4	M12 SW 10	80
273,0	271,0-276,0	10	10	35	142	305	335	9,9	M16 SW 14	100	
280,0	277,0-283,0	10	10	35	142	310	340	10,1	M16 SW 14	100	
315,0	311,0-318,0	10	10	35	142	345	375	11,0	M16 SW 14	100	
323,9	320,0-327,0	6	6	35	142	355	385	11,2	M16 SW 14	100	
355,0	352,0-359,0	6	6	35	142	385	415	12,0	M16 SW 14	120	
400,0	396,0-404,0	6	6	35	142	430	460	13,1	M16 SW 14	120	
406,4	402,0-410,0	6	6	35	142	440	470	13,3	M16 SW 14	120	

* Disponibilidad bajo pedido.

NOTA: Consultar precios

NOTA: Para la unión de tubos de plástico (PE,PP) y en el caso de tubos de PVC con paredes delgadas, la utilización de un anillo de refuerzo es obligatorio.